

## Main Feature

1. Small size with capacity up to 10A.
2. Dielectric Strength up to 3,000VAC.
3. Surge Strength up to 10,000V.
4. Class F insulation system.
5. Halogen Free series available.

## Contact Rating

Load Type	GJ (DM/LM)	GJ (D)
Rated Load (Resistive)	10A 120VAC	6A 125VAC
	5A 250VAC	3A 250VAC
	10A 30VDC	6A 30VDC
Contact capacity	TV-5 120VAC	-
Max. Allowable Voltage	AC 250V	AC 250V
	DC 30V	DC 30V
Max. Allowable Current	10A	6A
Max. Allowable Power Force	1,250VA	750VA
	300W	180W
Contact Material	Ag Alloy	Ag Alloy
Contact Form	SPST	SPDT

## Application

Domestic Appliances, Office Machines, Audio Equipment, Car Use...etc.

## Performance (at Initial Value)

- Contact Resistance ..... 100 mΩ Max. @1A,6VDC
- Operate Time..... 10 mSec. Max.
- Release Time ..... 4 mSec. Max.
- Dielectric Strength:  
Between Coil & Contact  
GJ-D ..... 2,500VAC  
GJ-DM(LM)..... 3,000VAC at 50/60 Hz  
for one minute.  
Between Contacts ..... 1,000VAC at 50/60 Hz  
for one minute.
- Surge Strength ..... 10,000V (between coil  
& contact 1.2x50μSec.)
- Insulation Resistance ..... 100 MegaΩ Min. at  
500VDC.
- Max. On/Off Switching:  
Electrical..... 6 Cycles per Minute.  
Mechanical ..... 300 Cycles per Minute.
- Temperature Range..... -30 ~ 105°C
- Humidity Range..... 45 ~ 85% RH.
- Coil Temperature Rise..... 40°C Max.(D Type)  
35°C Max.(L Type)

- Vibration:  
Endurance ..... 10 to 55 Hz dual  
amplitude width 1.5mm.  
Error Operation..... 10 to 55 Hz dual  
amplitude width 1.5mm.
- Shock:  
Endurance ..... 1,000 m/S<sup>2</sup> .  
Error Operation..... 100 m/S<sup>2</sup>.
- Life Expectancy:  
Mechanical ..... 10<sup>7</sup> Operations at No  
load condition.  
Electrical ..... 10<sup>5</sup> Operations at Rated  
Resistive Load.
- Weight ..... about 5.4 g.

## Safety Standard & File Number

- GJ-DM/LM Type:  
UL & C-UL ..... E141060  
TÜV ..... R9754184
- GJ-D Type:  
UL & C-UL ..... E141060  
TÜV ..... R50018123  
CQC.....02001001370  
09002036741

## Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ( $\Omega \pm 10\%$ )	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
GJ-D GJ-DM	3	150	20	Abt. 0.45	75% Maximum	5% Minimum	120%
	5	91	55				
	6	75	80				
	9	50	180				
	12	37.5	320				
GJ-LM	3	67	45	Abt. 0.2	75% Maximum	5% Minimum	120%
	5	40	125				
	6	33.3	180				
	9	22.5	400				
	12	16.7	720				
	24	8.3	2,880				

## Ordering Information

GJ - SS - 1 12 D M F

Insulation System:

Nil: Standard Class

F: F Class

Contact Form:

Nil: One Form C

M: One Form A

B: One Form B

Coil Type:

D: Standard DC Coil

L: High Sensitivity DC Coil

Coil Voltage:

03: 3V, 05: 5V, 06: 6V, 09: 9V, 12: 12V, 24: 24V

Number of Pole:

1: One Pole

Type of Sealing:

SS: RT II Flux Proofed Relays

SH: RT III Wash Tight Relays

Type:



GJ

## Classification


Model	GJ				
	Standard DC Coil			High Sensitivity DC Coil	
Contact Form	1C	1A	1B	1A	1B
Flux Proofed Relay	GJ-SS-1□□D	GJ-SS-1□□DM	GJ-SS-1□□DB	GJ-SS-1□□LM	GJ-SS-1□□LB
Wash Tight Relay	GJ-SH-1□□D	GJ-SH-1□□DM	GJ-SH-1□□DB	GJ-SH-1□□LM	GJ-SH-1□□LB

Dimension ( $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.1\text{mm}$ )

GJ-DM/LM

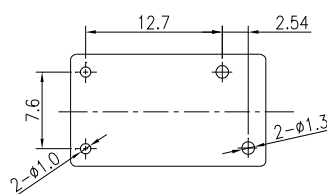
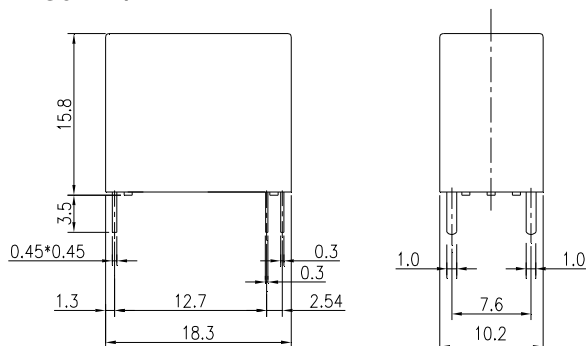


P.C.B. Layout




Bottom View

GJ-D

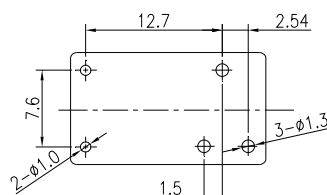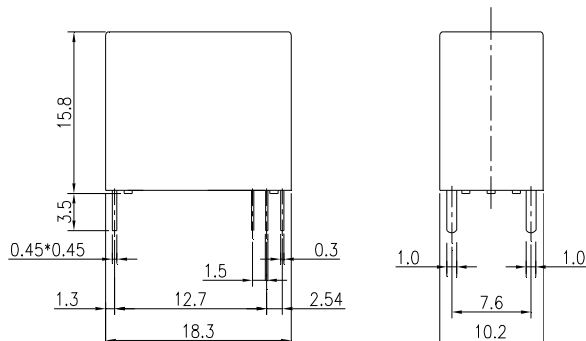

P.C.B. Layout



Bottom View