


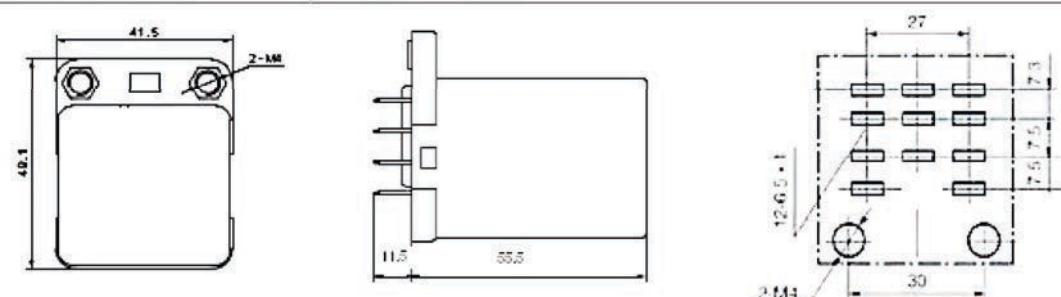

P38FC - 3C - 240VAC  
 Relay Type:-  
 Contact Form:- 3C  
 Coil Voltage:- 6 ~ 220VDC  
 6 ~ 380VAC

Model		P38FC			
Features	Dimension L * W * H (mm)	67 * 42 * 50			
	Terminal Type	Solder			
	Weight	130 gm Approximately			
Contact Data	Contact Form	3C			
	Contact Material	AgCdO			
	Contact Capacity	40A/250VAC, 40A/28VDC			
Coil Data	Coil Voltage ( DC)	6 - 220 VDC			
	Coil Voltage ( AC)	6 - 380 VAC			
	Coil Power Consumption	2.5W , 3.8 VA			
	Coil Specification	Coil Voltage	Coil Resistance( $\Omega$ ) $\pm$ 10%	Pull in Voltage	Drop Out Voltage
		12 VDC	58	80 %	5 %
24 VDC		210	80 %	5 %	
240 VAC		6500	85 %	30 %	
General Data	Dielectric Strength	1500 VAC @ 50 Hz / Min (Between Contacts)			
		2500 VAC @ 50 Hz / Min ( Between Coil & Contacts)			
	Insulation Resistance	1000 M $\Omega$			
	Electrical Life	5 x 10 <sup>4</sup> (On rated resistive load)			
	Mechanical Life	1 x 10 <sup>6</sup>			
	Operating Temperature	- 40 °C ~ + 55°C			
Mounting Diagram					
Application	Inverter, Voltage stabilizer, High Power Application, Domestic Application, HVAC etc.				