


Relay Type:- P63 P60

Contact Form:- 1C/2C

Coil Voltage:- 6 ~ 240VDC
6 ~ 240VAC

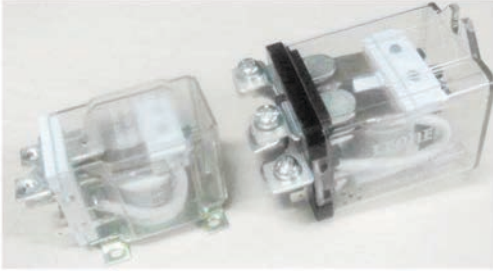

Model		P63FC	P60FC			
Features	Dimension L * W * H (mm)	70 * 47 * 47	80 * 47 * 48			
	Terminal Type	Screw Terminal				
	Weight	160 gm Approximately				
Contact Data	Contact Form	1C/ 2C				
	Contact Material	AgCdO				
	Contact Capacity	1C: 63A/250VAC, 63A/28VDC		2C: 60A/250VAC, 60A/28VDC		
Coil Data	Coil Voltage (DC)	6 - 240 V				
	Coil Voltage (AC)	6 - 240 V				
	Coil Power Consumption	1C: 2.2W		2C: 3.6 W		
	Coil Specification	Coil Voltage	Coil Resistance (Ω)		Pull in Voltage	Drop Out Voltage
			1C	2C		
		12 VDC	65	60	80 %	5 %
24 VDC		252	250	80 %	5 %	
240 VAC	5200	6150	85 %	30 %		
General Data	Dielectric Strength	1500 VAC @ 50 Hz / Min (Between Contacts)				
		2000 VAC @ 50 Hz / Min (Between Coil & Contacts)				
	Insulation Resistance	500 MΩ				
	Electrical Life	1 x 10 ⁵	2C: 1 x 10 ⁴ (On rated resistive load)			
	Mechanical Life	1 x 10 ⁷				
	Operating Temperature	- 40 °C ~ + 55 °C				
Mounting Diagram						
Application	Inverter, Voltage stabilizer, High Power Application, Phase Changeovers, Motor Controller, Street Lighting, HVAC etc.					