

## Main Feature

1. Miniature size 12.1x17.2x16.2mm on SAM-1P for smaller occupying space.
2. Easy P.C. Board design available as the location of contact terminal separated from each contact.
3. Distinctive twin relay structure on SAM-2P providing high performance for the use of automotive.
4. Both washable and flux proofed types available.
5. Comply with RoHS, REACH and ELV regulations

## Contact Rating

Load Type	SAM-1P (DM/DB)	SAM-1P (D)	SAM-2P (DM/DB)	SAM-2P (D)
Rated Load (Resistive)	N.O.: 10A 24VDC	N.O.: 10A 24VDC	N.O.: 15A 15VDC	N.O.: 15A 15VDC
	N.C.: 7A 24VDC	N.C.: 7A 24VDC	N.C.: 10A 15VDC	N.C.: 10A 15VDC
Rated Carrying Current	10A	10A	15A	15A
Max. Allowable Voltage	DC 30V	DC 30V	DC 30V	DC 30V
Max. Allowable Current	10A	10A	15A	15A
Max. Allowable Power Force	240W	240W	240W	240W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	SPST	SPDT	DPST	DPDT

## Application

Lighting Control, Central Door Lock Control, Power Window Control, Power Door Control, Sunroof Control

## Performance (at Initial Value)

- Contact Resistance ..... 100 mΩ Max. @1A, 6VDC
- Operate Time..... 10 mSec. Max.
- Release Time ..... 5 mSec. Max.
- Dielectric Strength:
  - Between Coil & Contact..... 1,000VAC at 50/60 Hz for one minute
  - Between Contacts ..... 500VAC at 50/60 Hz for one minute
- Surge Strength..... 2000V (between coil & contact 1.2x50μSec.)
- Insulation Resistance ..... 100 MegaΩ Min. at 500VDC
- Max. On/Off Switching:
  - Electrical..... 6 Cycles per Minute
  - Mechanical ..... 300 Cycles per Minute
- Temperature Range..... -40~+85°C
- Humidity Range ..... 45~85% RH.
- Coil Temperature Rise..... 60°C Max.

- Vibration:
  - Endurance ..... 10 to 55 Hz dual amplitude width 1.5mm
  - Error Operation..... 10 to 55 Hz dual amplitude width 1.5mm
- Shock:
  - Endurance ..... 1,000 m/S<sup>2</sup>
  - Error Operation..... 100 m/S<sup>2</sup>
- Life Expectancy:
  - Mechanical ..... 10<sup>7</sup> Operations at No Load condition
  - Electrical ..... 10<sup>5</sup> Operations at Rated Resistive Load
- Weight ..... SAM-1P: 8g  
SAM-2P: 15.2g

## Safety Standard & File Number

- NIL

## Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ( $\Omega \pm 10\%$ )	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
SAM-1P SAM-2P	5	91	55	Abt. 0.45	75% Maximum	5% Minimum	150% (for short time carrying current)
	6	75	80				
	9	50	180				
	12	38	320				
	18	25	720				
	24	19	1,280				

## Ordering Information

SAM - SS - 1 12 D M

Contact Form:

Nil: One Form C

M: One Form A

B: One Form B

D: Standard DC

Coil Type:

Coil Voltage:

05: 5V, 06: 6V, 09: 9V, 12: 12V, 18: 18V, 24: 24V

Number of Pole:

1: One Pole

2: Two Poles

Type of Sealing:

SS: RT II Flux Proofed

SH: RT III Wash Tight

Type:


SAM

## Classification


Model	SAM					
Number Of Pole	1 Pole			2 Poles		
Contact Form	1C	1A	1B	2C	2A	2B
Flux Proofed	SAM-SS-1□□D	SAM-SS-1□□DM	SAM-SS-1□□DB	SAM-SS-2□□D	SAM-SS-2□□DM	SAM-SS-2□□DB
Wash Tight	SAM-SH-1□□D	SAM-SH-1□□DM	SAM-SH-1□□DB	SAM-SH-2□□D	SAM-SH-2□□DM	SAM-SH-2□□DB

Dimension ( $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.1\text{mm}$ )

### SAM-SS/SH(1P)

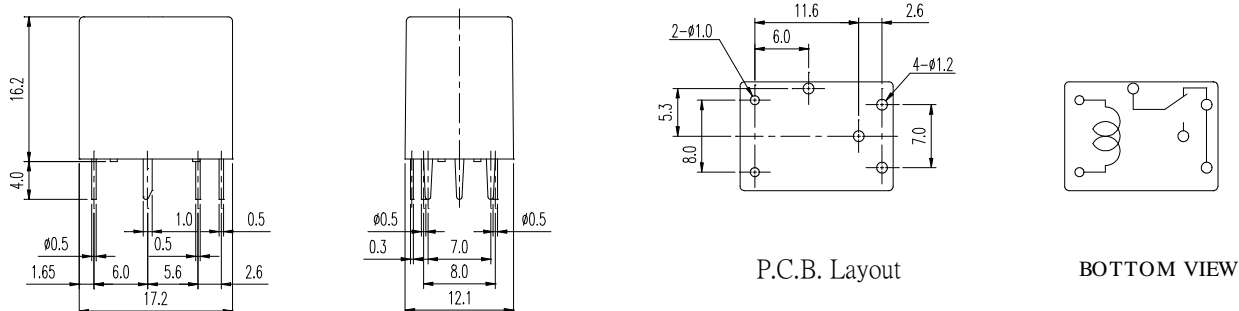

### SAM-SS/SH(2P)

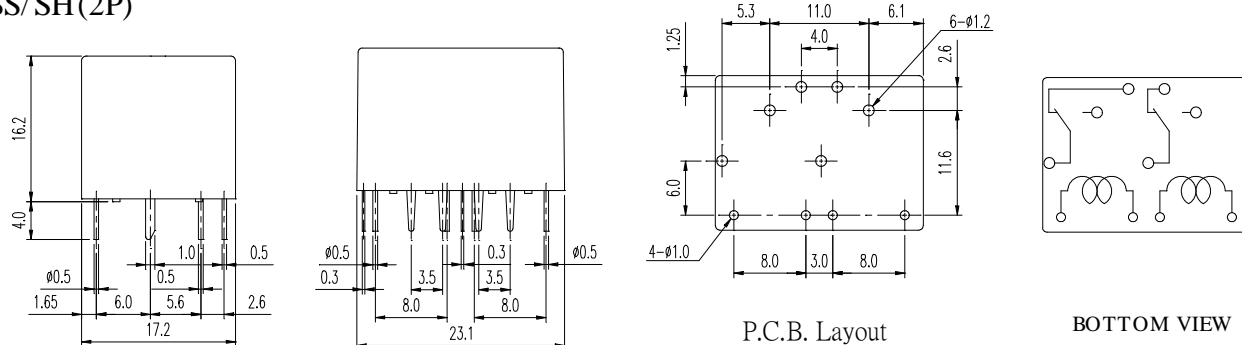

V.01DS